

19" Full Feature Welded Steel Equipment Racks - Gangable

RXG Series

- * Full featured equipment rack intended for use as a ganged racking system, however can be used as a stand alone unit as well.
- * Sides are constructed from 16-gauge steel, top and bottom are made from 14-gauge steel.
- * Welded at 28 final assembly points for extra strength and rigidity.
- * The RXG racks are designed to hold up to a 1000lbs. of equipment.
- * Rack outer width is 22". Offered in two depths; a 26" deep rack with 24" of useable internal depth (rail to rail) and a 31" deep rack with 29" of useable internal depth (rail to rail).
- * Flush mounted rear door is included. Both rear and optional front door can be hinged from the left or right side of the rack. (Included with the door is a lock and a pocket handle.)
- * Front and rear fully adjustable 10-32 threaded rack rail is included and pre-installed.
- * Finished in durable black textured powder coat.

RXG Options - Sold Separately

- Standard Top - **Part #: RX-ST**
- Vented Top - **Part #: RX-VT**
- Top w/ 4 fan knock-outs - **Part #: RX- 4FT**
- Top w/ opening for a 10" fan - **Part #: RX-10FT**

Optional removable side panels.

- 44 Space and 26" Deep - **Part #: RX-SP44-262**
- 44 Space and 31" Deep - **Part #: RX-SP44-312**


- Standard Front Door - **Part #: SD-44**
- Vented Front Door - **Part #: VD-44**
- Plexi-glass Front Door - **Part #: PD-44**

Caster bases with weight capacity of 1300 lbs.

- 26" Deep Caster Base - **Part #: RXG-CB26**
- 31" Deep Caster Base - **Part #: RXG-CB31**
- Set of 4 Leveling Feet - **Part #: RLF**
- Seismic Floor Anchors - **Part #: RXG-Z4**

10 Rack Ganging Hardware kit - **Part #: RGH-10**


RXG Series & Accessories

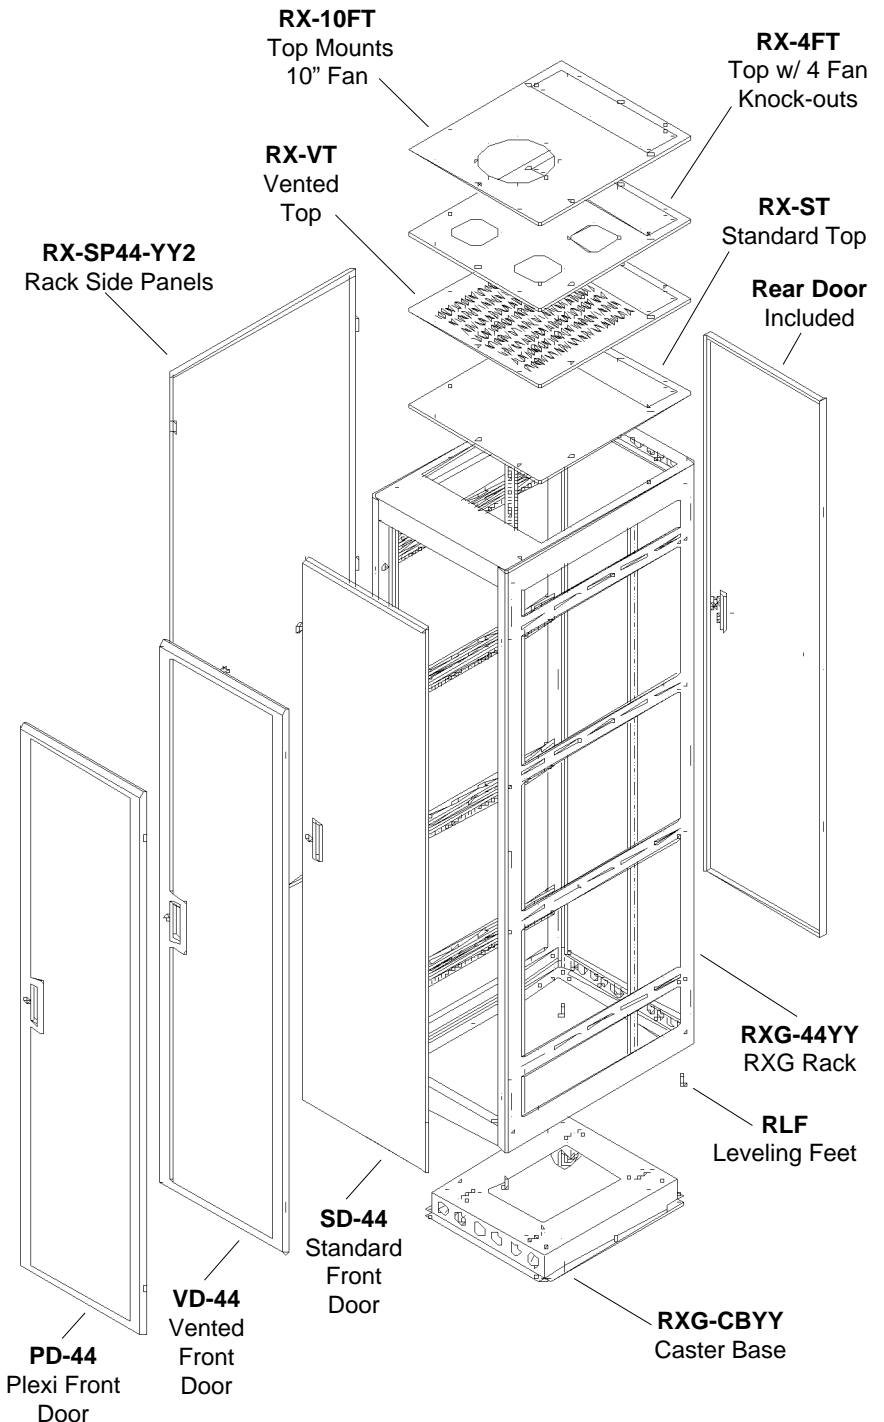


YY = Rack Depth
XX = Rack Space Height

RXG Series

Front View

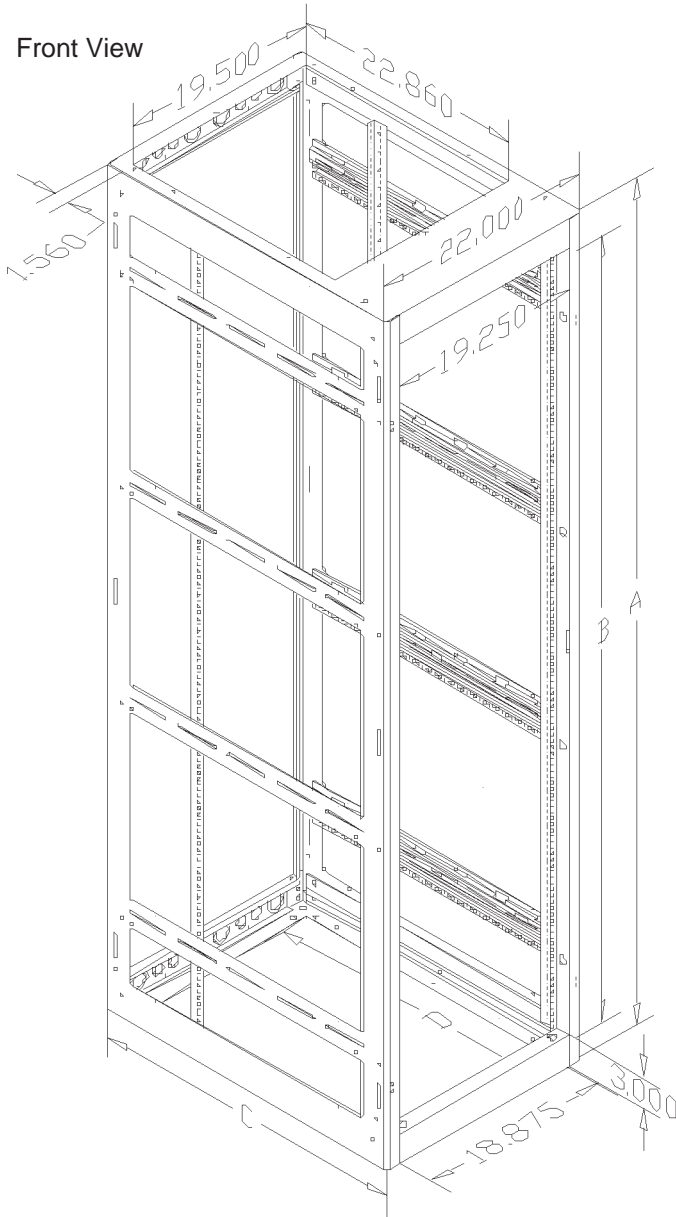

Rear View - Electrical Knock-Outs (Top/Bottom)

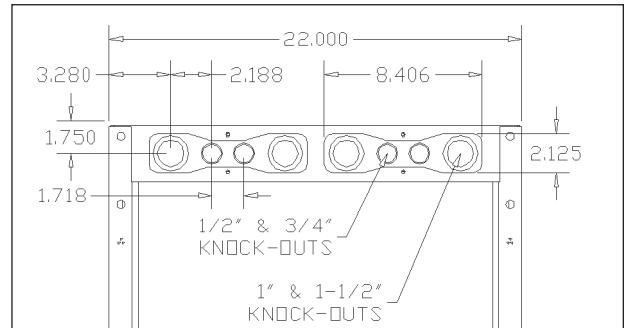

Front door clearance: When the front door is closed and the rack rail is in the forward-most position, the distance between the front of the rack rail and the door is 2.23" (Standard and vented doors), and 2.04" (Plexi-glass door).

Rear door clearance: When the rear door is closed and the rack rail is in the rear-most position, the distance between the out-side edge of the rack rail and the inside of the door is 1.03".

Optional side panel clearance: When the optional side panels are installed onto the rack, each panels adds a thickness of 0.63" to the width of the rack. The width of the rack changes from 22.00" to 23.25".

Caster base clearance: When a caster base is installed into the rack, the over all height of the rack is increased only by 0.75".

See other side for part descriptions.

To order any of these racks and options use these part numbers:

RXG-XXYY	SD-XX	VD-XX	PD-XX
RXG-CBYY	RX-SPXX-YY2		


(XX= rack space height)
(YY= rack & accessory depth)

Note: Currently offered only in 44 rack space.


Part #:	Dim "A"	Dim "B"	Dim "C"	Dim "D"
RXG-4426	83.125"	77.125"	26.400"	22.250"
RXG-4431	83.125"	77.125"	31.400"	27.250"

RXG Series - Top Options


RX-ST

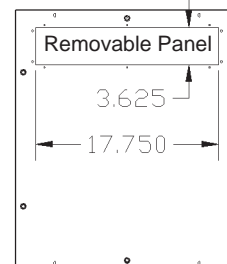


RX-VT

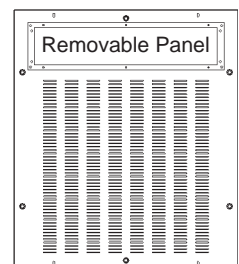

1 to 4 Fans
Cover
Plates
Included.

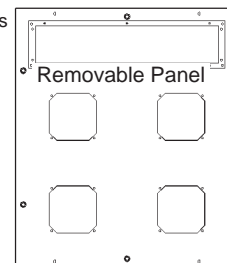

RX-4FT

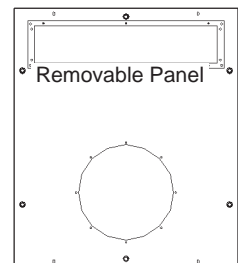

RX-10FT

Removable panel opening accommodates 2 space panels.



ARNSCOTT ELECTRONICS GROUP