





www.arnscott.com



IW-6 / IW-6R

In wall quick install speaker systems for indoor applications

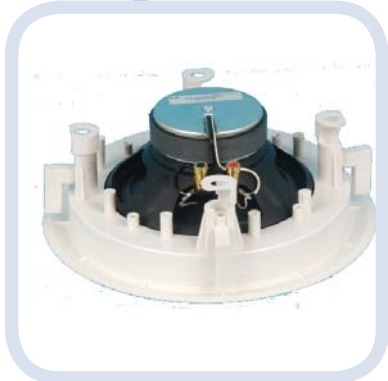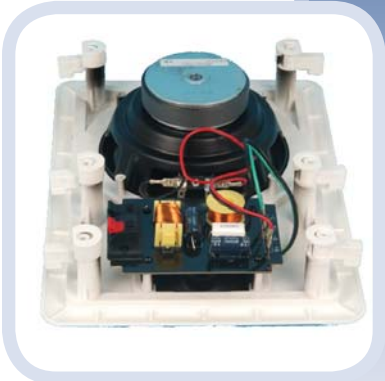

FEATURES

- For use in, restaurants, churches, auditoriums, boardrooms, retail stores, night clubs, bars, retail stores, airports, train depots, coliseums, residential background music or wherever an application for background music or paging system is required.
- Finished in white high quality ABS plastic. The metal mesh grill is painted to match.
- This self contained speaker unit accepts 8 ohm inputs. Optional line matching transformers are available as an option.
- Available in either rectangular 2-way or round co-axial type configuration.
- Speaker is polypropylene coned for longer life.

IW-6 / IW-6R

In-Wall Quick Install Self Contained Speaker System for Indoor Applications

IW-6 / IW-6R

SPECIFICATIONS

MODEL NO.:	IW-6	IW-6R
TYPE OF SYSTEM:	2-Way Rectangular Frame	Round co-axial
DIMENSIONS:	8-1/2"(21.5cm)W x 12"(30.5cm)L	17.2cm (6-3/4") x 27.9cm (11")
FREQUENCY RANGE:	50 - 18 kHz.	50 - 18 kHz.
DISPERSION PATTERN:	90 degrees	90 degrees
POWER RATING:	30 Watt	25 Watt
SOUND PRESSURE LEVEL:	89dB.	89dB.
VOICE COIL DIAMETER:	2.5cm (1")	2.5cm (1")
COLOUR:	White	White

ARCHITECTS AND ENGINEERS SPECIFICATIONS

MODELS IW-6 / IW-6R

The in wall speaker systems shall be AEG Models IW-6 and IW-6R. The units shall consist of one woofer used in conjunction with a 1" soft dome tweeter. The woofer cone shall be constructed of weatherproof polypropylene. The speaker units shall have mounting facilities for a 70.7 Volt(optional) audio line matching transformer . The finish shall be white paintable, injection moulded plastic, with matching white painted metal grille. The IW-6 come equipped with a sturdy metal installation bracket, while the IW-6R is designed with quick install clamps. For line matching transformers, use Arnscott Models A70-10L, A70-8 or A70-16.